

**FBM233 Field Device System Integrator Module,
10/100 Mbps Ethernet, Redundant**



The FBM233 Redundant Field Device System Integrator (FDSI) module provides an Ethernet interface between single or dual-ported field I/O devices and the Foxboro Evo™ system.

OVERVIEW

Each FBM233 module has a single 10/100Mbps copper Ethernet connection and a single RJ-45 connector on the front of the module for connectivity to dual-ported Ethernet devices. The FBM233 is connected to Ethernet switches or hubs in order to communicate with one external device or up to 64 external devices.

A pair of modules combine to provide redundancy at the Fieldbus Module (FBM) level. In this configuration, one FBM233 is the Master, and the other is the Tracker module. Input points on the control station are updated from the device inputs received on the

network connected to the Master. Device output points, depending on the I/O driver, are written by both the Master and Tracker module. Role switching is automatic if problems are detected (for example, loss of heartbeat from any device) by the I/O driver, or the user can switch the roles at any time via SMDH. The general network configuration is shown in Figure 1.

FEATURES

Key features of the FBM233 are:

- ▶ Redundant 10 Mbps or 100 Mbps Ethernet network transmission rate to/from field devices
- ▶ Communicates with up to 64 field devices
- ▶ I/O software driver is downloadable from a library of available protocols
- ▶ Up to 2000 DCI block connections
- ▶ Integrates field device data into a Foxboro Evo control database using Ethernet connectivity
- ▶ Field mounted
- ▶ Class G3 (harsh) environments.

I/O DRIVERS

This FBM is a generic Ethernet hardware module in which different software drivers can be loaded. These drivers configure the FBM to recognize a particular protocol used by the device. Several of these software drivers are a standard product offerings. Other custom drivers can be developed to meet specific needs. These drivers are dynamically downloaded to the FBM233 with software code specifically designed to interface with the third party device's protocol.

The configuration procedures and the software requirements for each driver are unique to the device(s) being integrated into the system.

ETHERNET LINK SETUP

Data communication between the FBM233 and field devices are through the RJ-45 connector located on the front of the FBM233 module. The RJ-45 connector of the FBM233 can be connected through hubs, or through Ethernet switches to the field devices (refer to "ETHERNET SWITCHES FOR USE WITH FBM233" on page 7). The FBM233 is connected to Ethernet switches or hubs in order to communicate with one external device or up to 64 external devices.

CONFIGURATOR

The FDSI configurator sets up the FBM233 port and XML based device configuration files. The port configurator allows for easy setup of the communication parameters for each port (such as, Dynamic Host Configuration Protocol (DHCP), IP addresses). The device configurator is not needed for all devices, but when needed it configures device specific and point specific considerations (such as, scan rate, address of the data to be transferred, and the amount of data to be transferred in one transaction).

OPERATIONS

Each FBM233 pair can access up to 64 devices to read or write data.

From the Foxboro Evo control station to which the FBM233 is connected (refer to Figure 1), up to 2000 Distributed Control Interface (DCI) data connections can be made to read or write data. Supported data types are determined by the particular driver loaded on the FBM233, which converts the data to the DCI data types listed below:

- ▶ An analog input or output value (integer or IEEE single-precision floating point)
- ▶ A single digital input or output value
- ▶ Multiple (packed) digital input or output values (packed in groups of up to 32 digital points per connection).

Thus a Foxboro Evo control station can access up to 2000 analog I/O values, or up to 64000 digital I/O values, or a combination of digital and analog values using the FBM233. The frequency of access to the FBM233 data by a control station can be as fast as 500 ms. The performance is dependant on each device type and the layout of data in the device.

The FBM233 collects the required data from the devices, performs the necessary conversions, and then stores the converted data in its database for incorporation into the Foxboro Evo plant

management functions and operator displays. Data may also be written out to the individual devices from the Foxboro Evo system.

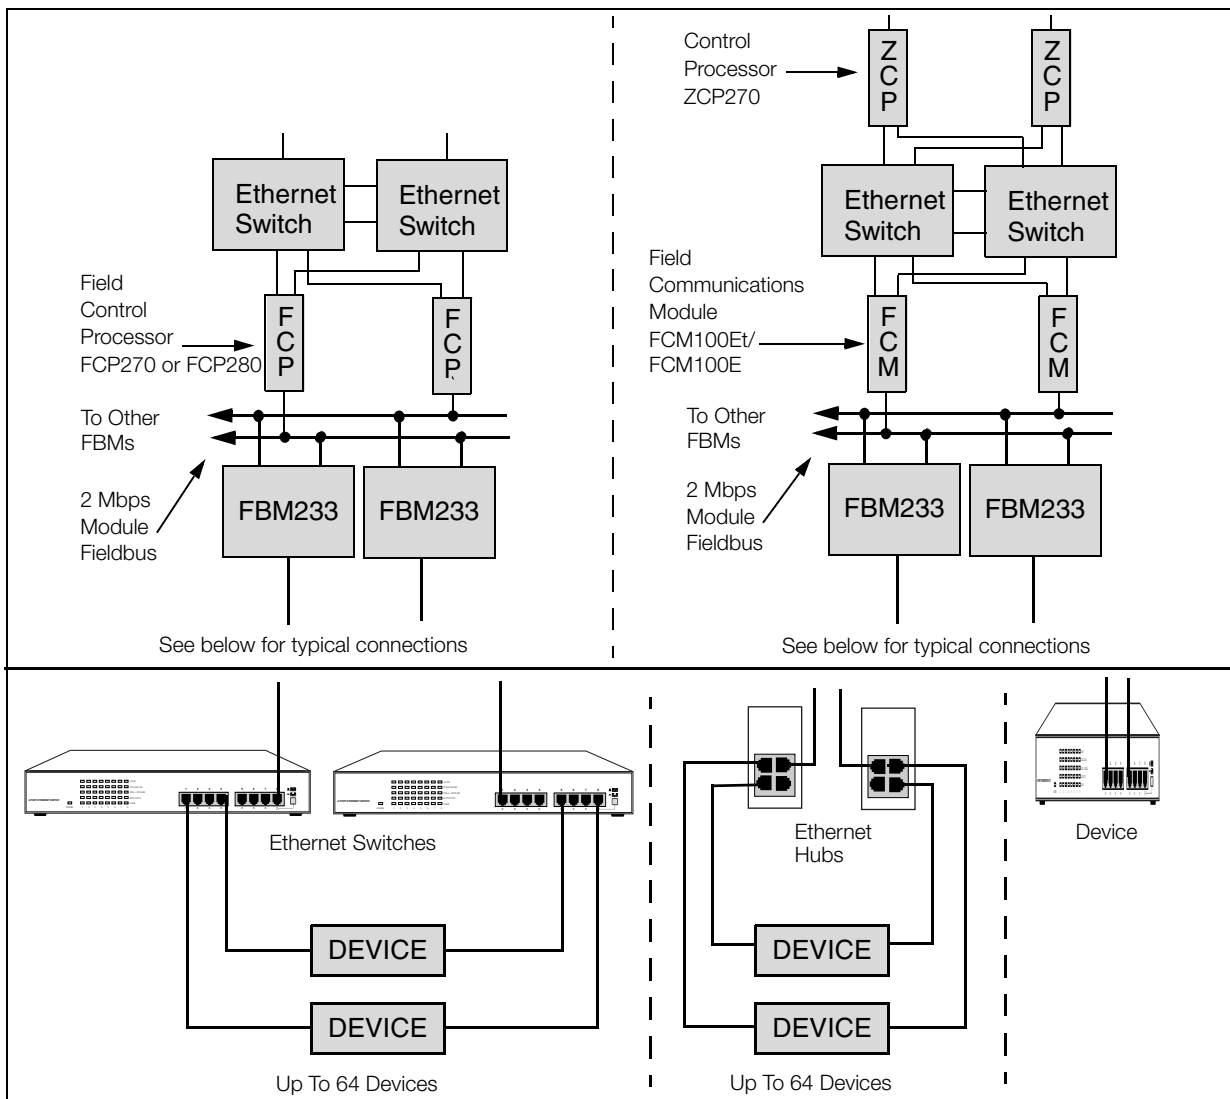


Figure 1. FBM233 Redundant Module Configuration

CONTROL BLOCK SUPPORT

The FBM233 offers control block support for the following standard Foxboro Evo Distributed Control Interface (DCI) block types:

BIN	Binary Input
BINR	Binary Input Redundant
BOUT	Binary Output
IIN	Integer Input
IOUT	Integer Output
PAKIN	Packed Input
PAKOUT	Packed Output
PLSOUT	Pulse Output
RIN	Real Input
RINR	Real Input Redundant
ROUT	Real Output
STRIN	String Input
STROUT	String Output

The DCI blocks are configured just like other Foxboro Evo control blocks. The DCI blocks address and read/write data from/to the addressed field device.

STANDARD, RUGGED DESIGN

The FBM233 has a rugged extruded aluminum exterior for physical and electrical protection of the circuits. Enclosures, specially designed for mounting the FBMs, provide various levels of environmental protection, up to Class G3 harsh environments per ISA Standard S71.04.

HIGH RELIABILITY

The redundancy of the module pair, coupled with the high coverage of faults, provides very high subsystem availability time.

Either module may be replaced without upsetting field input or output signals to the other module. A module can be removed or replaced without removing power to the other FBM modules in the Modular Baseplate.

MODULAR BASEPLATE MOUNTING

The module mounts on a Modular Baseplate, which accommodates up to four or eight FBMs. The Modular Baseplate is either DIN rail mounted or rack mounted. The Modular Baseplate includes signal connectors for the FBMs, provides connections for independent DC power supplies, I/O cable connections, 2 Mbps Module Fieldbus connections.

Redundant modules must be located in odd and adjacent even positions on the baseplate (positions 1 and 2, 3 and 4, 5 and 6, or 7 and 8).

FIELDBUS COMMUNICATION

The Fieldbus Communication Module (FCM100Et or FCM100E) or the Field Control Processor (FCP270 or FCP280) interface the redundant 2 Mbps module Fieldbus used by the FBMs. The FBM233 accepts communication from either path of the 2 Mbps module Fieldbus - should one path fail or be switched at the system level, the module continues communication over the active path.

VISUAL INDICATORS

Light-emitting diodes (LEDs) incorporated into the front of the module provide visual indication of the module's operational status, and the communication activity (Transmit or Receive) of the Ethernet ports. Two additional LEDs provide the master or tracker status of the modules.

FUNCTIONAL SPECIFICATIONS

Communications

BUS CHARACTERISTICS

Communication Type

Ethernet

Communication Transmission Rate

10 Mbps or 100 Mbps

Communication Protocol

UDP/IP or TCP/IP

IP Address

Fixed or DHCP

NOTE

For driver specific limitations on I/O Capacity and Data Types Transferred, refer to the corresponding driver PSS or User's Guide.

I/O CAPACITY

Up to 64 devices per FBM233 maximum (number of actual devices is performance dependent) with up to 2000 DCI connections.

DATA TYPES TRANSFERRED

2-byte or 4-byte signed or unsigned integers, 4-byte IEEE single-precision floating values, or binary values. Automatic conversion for other types as implemented in the downloadable driver.

FASTEST ALLOWED ECB BLOCK PERIOD

500 msec

Module Fieldbus Communication

Communicates with its associated FCM100Et, FCM100E, FCP280, or FCP270 via the redundant 2 Mbps module Fieldbus.

FBM233 Power Requirements

INPUT VOLTAGE RANGE (REDUNDANT)

24 V dc +5%, -10%

CONSUMPTION

7 W maximum, each module

HEAT DISSIPATION

7 W maximum, each module

Regulatory Compliance

ELECTROMAGNETIC COMPATIBILITY (EMC)

European EMC Directive 2004/108/EC (Prior to April 20, 2016) and 2014/30/EU (Beginning April 20, 2016)

Meets: EN61326-1:2013 Class A Emissions and Industrial Immunity Levels

RoHS COMPLIANCE

Complies with European RoHS Directive 2011/65/EU

PRODUCT SAFETY

Underwriters Laboratories (UL) for U.S. and Canada

UL/UL-C listed as suitable for use in UL/UL-C listed Class I, Groups A-D; Division 2; temperature code T4 enclosure based systems when connected to specified Foxboro Evo processor modules as described in the *Standard and Compact 200 Series Subsystem User's Guide* (B0400FA). Communications circuits also meet the requirements for Class 2 as defined in Article 725 of the National Electrical Code (NFPA No.70) and Section 16 of the Canadian Electrical Code (CSA C22.1). Conditions for use are as specified in the *Standard and Compact 200 Series Subsystem User's Guide* (B0400FA).

European Low Voltage Directive 2006/95/EC (Prior to April 20, 2016) and 2014/35/EU (Beginning April 20, 2016) and Explosive Atmospheres (ATEX) directive 94/9/EC (Prior to April 20, 2016) and 2014/34/EU (Beginning April 20, 2016)

DEMKO certified as Ex nA IIC T4 for use in certified Zone 2 enclosure when connected to specified I/A Series processor modules as described in the *Standard and Compact 200 Series Subsystem User's Guide* (B0400FA).

FUNCTIONAL SPECIFICATIONS (CONTINUED)

MARINE CERTIFICATION

ABS Type Approved and Bureau Veritas

Marine Certification for Environmental Category EC31.

Calibration Requirements

Calibration of the module is not required.

ENVIRONMENTAL SPECIFICATIONS

Operating

TEMPERATURE

-20 to +70°C (-4 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

Storage

TEMPERATURE

-40 to +70°C (-40 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

Contamination

Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.

PHYSICAL SPECIFICATIONS

Mounting

The FBM233 mounts on a Modular Baseplate. The Modular Baseplate can be mounted horizontally or vertically on a DIN rail, or mounted horizontally in a 19-inch rack using a mounting kit. Refer to PSS 31H-2SBASPLT for details.

Dimensions

HEIGHT

102 mm (4 in)

114 mm (4.5 in) including mounting lugs

WIDTH

45 mm (1.75)

DEPTH

104 mm (4.11 in)

Part Number

P0926GX

Weight

284 g (10 oz) approximate, per module

Cables

FROM MODULE TO HUB/SWITCH/DEVICE

1 m (3.3 ft) up to 100 m (330 ft)

CONNECTORS

RJ-45

NULL HUB ADAPTER

P0971PK

ETHERNET SWITCHES FOR USE WITH FBM233

DIN Rail Mounted 5-Port 10/100 Base TX Switch

The 5-port 10/100 base TX Ethernet switch (P0972WE) is Din rail mounted and available for use with the FBM233. You can connect up to four Ethernet devices using this 5-port switch. Additionally, multiple switches can be interconnected to connect up to 64 devices to a single FBM233.

For detailed physical and electrical specifications, refer to *Model SFNB 5TX 2891001* at www.phoenixcontact.com/us/products.

Rack and Chassis Mounted Fast Ethernet Switches

For information on the Fast Ethernet switches refer to *The Foxboro Evo Control Network Ethernet Equipment* (PSS 31H-7NW_EQUIP).



10 Mbps (P0972WE)

Figure 2. 5-Port 10/100 Base TX DIN Rail Mounted Ethernet Switch (P0972WE)

FOR MORE INFORMATION

For more information refer to the following Product Specification Sheets:

RELATED PRODUCT SPECIFICATION SHEETS

PSS Number	Description
PSS 31H-2SOV	Standard 200 Series Subsystem Overview
PSS 31H-2CERTS	Standard and Compact 200 Series I/O - Agency Certifications
PSS 31H-7NW_EQUIP	The Foxboro Evo Control Network Ethernet Equipment



Invensys Systems, Inc.
38 Neponset Avenue
Foxborough, MA 02035-2037
United States of America
www.schneider-electric.com

Global Customer Support
Inside U.S.: 1-866-746-6477
Outside U.S.: 1-508-549-2424
Website: <https://support.ips.invensys.com>

Copyright 2015-2016 Invensys Systems, Inc.
All rights reserved.
Invensys is now part of Schneider Electric.

Schneider Electric, Invensys, Foxboro, Foxboro Evo, FoxCom, and I/A Series, are trademarks owned by Schneider Electric S.E, its subsidiaries and affiliates. All other trademarks are the property of their respective owners.